

## MAIN FEATURES

- ❖ High sensitivity
- ❖ High dynamic range
- ❖ 4 W composite RF output power
- ❖ Wavelength division multiplexing technique
- ❖ SNMP support




## DESCRIPTION

This repeater is intended to be used for TETRA indoor optical fibre systems. It is a compact and reliable unit, and it is especially advantageous to use it in areas where off-air transmission is not preferable. The base station side optical master unit can control and monitor the slave unit on the remote repeater side through the optical fibre. This very economical solution can be installed easily, and the repeater can be monitored and controlled using the provided remote-control software.

## SPECIFICATIONS

ELECTRICAL PARAMETERS	
Frequency band	Downlink: 390 – 395 MHz Uplink: 380 – 385 MHz
Operating frequency bandwidth	5 MHz
Mode of operation	Band selective duplex
Linear output power	Downlink: +36 dBm or 2 x +33 dBm (2 carriers), meets ETSI regulation
ICP3	Downlink: +68 dBm minimum @ 2 x 33 dBm
ACPR	60 dB @ linear output power
Nominal gain	65 dB
Gain setting range	65 to 40 dB adjustable in 1 dB steps
Gain ripple	<±1.5 dB typical
Gain stability	<±1.5 dB (within operating temperature range)
Uplink input noise figure	<6 dB @ maximum gain
Harmonics	According to ETSI regulation
Spurious radiation	According to ETSI regulation
EVM	<1% typical (ETSI regulation <10%)
Optical module maximum RF input power	+5 dBm
Power supply voltage	2 x 48 VDC (with monitoring)
Power consumption	<90 W
MECHANICAL PARAMETERS	
Type of power supply connectors	DFK-MSTB2,5/3-G; Phoenix (accessory SH03-5,08)
Type of optical connector	FC/APC
Type of RF connector	N – female
Weight	<18 kg
Dimension	19" 3U (see outline dimensions)


ENVIRONMENTAL PARAMETERS			
Operating temperature range	0 °C ... +45 °C		
Storage temperature range	-30 °C ... +70 °C		
Relative humidity	<75%, non-condensing		
Cooling	Switched forced cooling		
Degree of protection	IP20 Indoor		
SOFTWARE PARAMETERS			
Wired control	Ethernet (SNMP v1 / v2c)		
Alarm I/O	4 external alarm inputs, user configurable sum alarm output (dry contact), SNMP notifications, status LED		
Remote control	Through optical fibre via master unit		
EXTERNAL ALARM AND SUM ALARM CONNECTOR PINOUT (D-SUB MALE) <sup>(1)</sup>			
Pin no.	Function	Pin no.	Function
1	Ext. Alarm IN 1	6	Ext. Alarm COMMON
2	Ext. Alarm IN 2	7	Dry Contact
3	N.C.	8	Ext. Alarm IN 3
4	Dry Contact	9	Ext. Alarm IN 4
5	Ext. Alarm COMMON	-	-

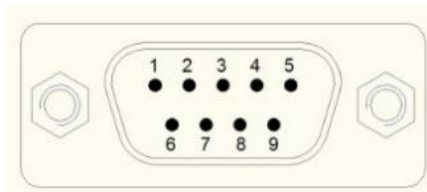

Specifications are subject to change without notice.

(1) In POWERED OFF state the relay will be open. The operation of the Dry Contact relay is configurable by the user.

### OUTLINE DRAWING (mm)

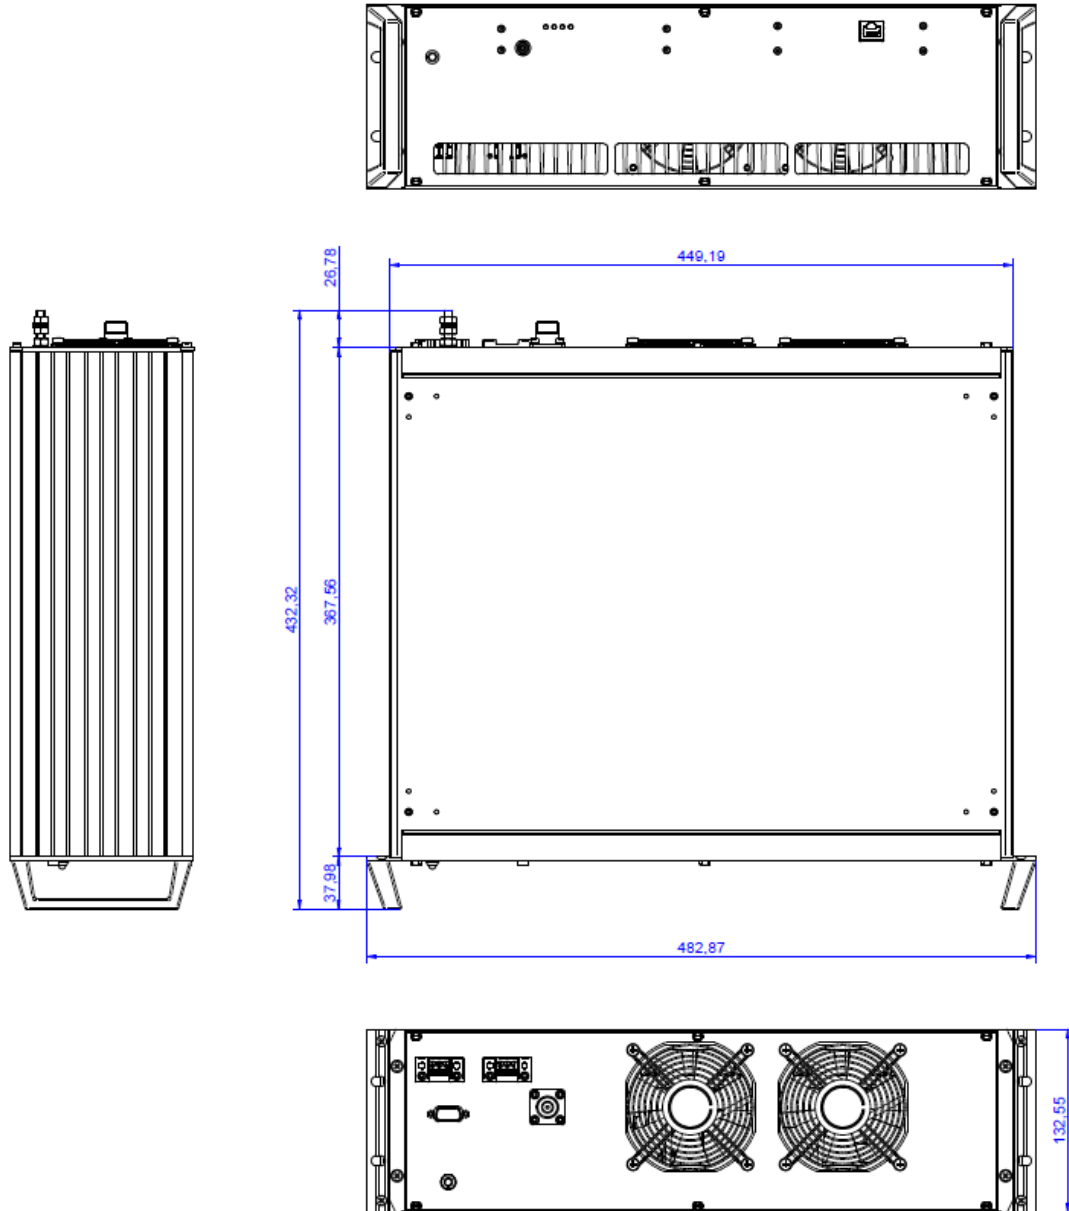

### ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION
BRTF44K10737	BRTF44, 36dBm, S1, 380-385 MHz / 390-395 MHz, G 65dB, 2x48 VDC Dual DC connector, 3U RACK, FC/APC, SNMP

### DOCUMENT REVISION

DOCUMENT NAME	REVISION	DATE
BRTF44-LM-K10737	V02	2023-03-30